

**Silicon NPN Darlington Power Transistor**

**BDX67/A/B/C**

**DESCRIPTION**

- High DC Current Gain-  
:  $h_{FE} = 1000(\text{Min}) @ I_C = 10A$
- Low Saturation Voltage
- Complement to Type BDX66/A/B/C

**APPLICATIONS**



- Designed for audio output stages and general amplifier and switching applications

**ABSOLUTE MAXIMUM RATINGS( $T_a = 25^\circ\text{C}$ )**

SYMBOL	PARAMETER	VALUE	UNIT	
$V_{CBO}$	Collector-Base Voltage	BDX67	80	V
		BDX67A	100	
		BDX67B	120	
		BDX67C	140	
$V_{CEO}$	Collector-Emitter Voltage	BDX67	60	V
		BDX67A	80	
		BDX67B	100	
		BDX67C	120	
$V_{EBO}$	Emitter-Base Voltage	5	V	
$I_C$	Collector Current-Continuous	16	A	
$I_{CM}$	Collector Current-Peak	20	A	
$I_B$	Base Current	250	mA	
$P_C$	Collector Power Dissipation @ $T_C = 25^\circ\text{C}$	150	W	
$T_J$	Junction Temperature	200	$^\circ\text{C}$	
$T_{stg}$	Storage Temperature Range	-65~200	$^\circ\text{C}$	


**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th-j-c}$	Thermal Resistance, Junction to Case	1.17	$^\circ\text{C/W}$

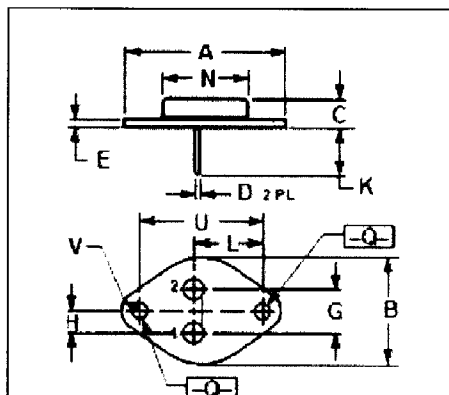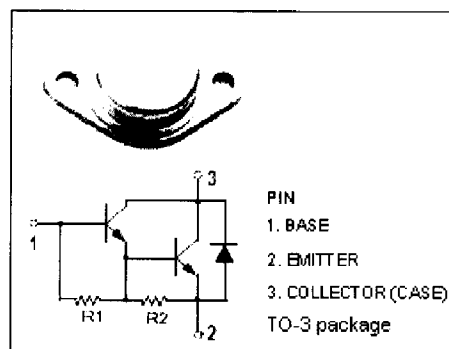

DIM	mm	
	MIN	MAX
A	39.00	
B	25.30	26.67
C	7.80	8.30
D	0.90	1.10
E	1.40	1.60
G	10.92	
H	5.46	
K	11.40	13.50
L	16.75	17.05
N	19.40	19.62
Q	4.00	4.20
U	30.00	30.20
V	4.30	4.50

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



# Silicon NPN Darlington Power Transistor

# BDX67/A/B/C

## ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEQ(SUS)}$	Collector-Emitter Sustaining Voltage	BDX67	$I_C=100\text{mA}; L=25\text{mH}$			V
		BDX67A				
		BDX67B				
		BDX67C				
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=10\text{A}; I_B=40\text{mA}$			2.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C=10\text{A}; V_{CE}=3\text{V}$			2.5	V
$I_{CBO}$	Collector Cutoff Current	BDX67				mA
		BDX67A				
		BDX67B				
		BDX67C				
$I_{CEO}$	Collector Cutoff Current	$V_{CE}=1/2V_{CEQ(Max)}; I_B=0$			1.0	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=5\text{V}; I_C=0$			5.0	mA
$h_{FE-1}$	DC Current Gain	$I_C=1\text{A}; V_{CE}=3\text{V}$		5200		
$h_{FE-2}$	DC Current Gain	$I_C=10\text{A}; V_{CE}=3\text{V}$	1000			
$h_{FE-3}$	DC Current Gain	$I_C=16\text{A}; V_{CE}=3\text{V}$		4000		
$V_{ECF}$	C-E Diode Forward Voltage	$I_F=10\text{A}$		2.5		V
$C_{OB}$	Output Capacitance	$I_E=0; V_{CB}=10\text{V}; f_{test}=1.0\text{MHz}$		300		pF